


NEW

ROLLTECH[®]

ROLLTECH A/S - an Alu-Pro Group Company

CHROMATECH ultra S[®]

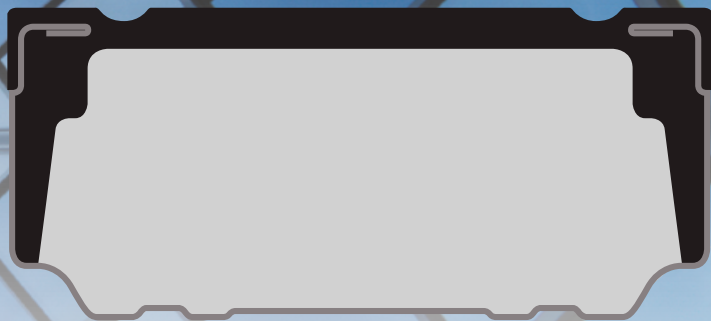

- Even more stability - easier handling in production
- 2 mm covered side flanges - no shiny part visible
- Easy cutting and bending - fast and efficient production
- Easier sealant application - high productivity and quality
- Same accessories - easy change to new type

**New stronger Hybrid Warm Edge spacer
for the most demanding applications**

Sizes

Type	Width	CHROMATECH ultra F®	CHROMATECH ultra S®
8	7.5 mm	✓	(✓)
10	9.5 mm	✓	(✓)
12	11.5 mm	✓	✓
13	12.5 mm	✓	(✓)
14	13.5 mm	✓	✓
15	14.5 mm	✓	✓
16	15.5 mm	✓	✓
18	17.5 mm	✓	✓
20	19.5 mm	✓	✓
22	21.5 mm	✓	(✓)
24	23.5 mm	✓	(✓)
26	25.5 mm		(✓)
Height		6.9 mm	6.85 mm

All sizes available 2018. CHROMATECH ultra S® can be supplied in black, light grey, window grey, clay brown, mahogany brown and traffic white.
Same accessories as CHROMATECH ultra F®

Thermal data

Double IG-unit: 4/16/4 with $U_g = 1.1 \text{ W/m}^2\text{K}$

Ψ values in W/mK

Frame	Spacer Bar	
	Aluminium	CHROMATECH ultra S®
Aluminium	0.111	0.052
Wood/Aluminium	0.092	0.045
Wood	0.081	0.042
PVC	0.077	0.041

Triple IG-unit: 4/12/4/12/4 with $U_g = 0.7 \text{ W/m}^2\text{K}$

Ψ values in W/mK

Frame	Spacer Bar	
	Aluminium	CHROMATECH ultra S®
Aluminium	0.111	0.047
Wood/Aluminium	0.097	0.044
Wood	0.086	0.041
PVC	0.075	0.040

IFT certified.